

### LJJAS-500 CNC Corner Connector Cutting Saw



Input voltage : 380V 50Hz  
Motor power : 3.0Kw  
Motor rotary speed : 2800r/min  
Air pressure : 0.5-0.8MPa

### LXD-250 Auto End-milling Machine



Input voltage : 380V 50Hz  
Motor power : 3 × 2.2Kw  
Motor rotary speed : 2800r/min  
Air pressure : 0.5-0.8MPa  
Max open tenon : 40mm

### LMB-180B Heavy Duty Corner Crimping Machine



Input voltage : 380V 50Hz  
Rating power : 3.0Kw  
Rating oil pressure : 20MPa  
Air pressure : 0.5-0.8MPa  
Profile height : 180mm

### LJJB-450×100 Corner Connector Cutting Saw



Input voltage : 380V 50Hz  
Motor power : 2.2Kw  
Motor rotary speed : 2800r/min  
Air pressure : 0.5-0.8MPa

### LXDA-200 Auto End-milling Machine



Input voltage : 380V 50Hz  
Total power : 15Kw  
Motor rotary speed : 2800r/min  
Air pressure : 0.6-0.8MPa  
Saw Blade Specification :

### LMB-120B Corner Crimping Machine



Input voltage : 380V 50Hz  
Rating power : 2.2Kw  
Rating oil pressure : 16MPa  
Air pressure : 0.5-0.8MPa  
Profile height : 120mm

### BX1600 Horizontal Hollow Glass Cleaning Machine



Input voltage : 380V 50Hz  
Total power : 7.5Kw  
Work speed : 1.2-5.0m/min  
Max.Glass size : 1600 × 2000mm  
Min.Glass size : 400 × 400mm

### LWZ2000 Automatic Bar Bending Machine



Input voltage : 380V 50Hz  
Total power : 4Kw  
Min. bending size : 300 × 300mm  
Max. bending size : 2500 × 2500mm  
Max. feeding speed : 120m/min  
Bending Qty : <305/pc(1000 × 1000mm)  
Overall dimension : 10500 × 2200 × 2600mm

### MBJ Edge Polishing Machine




Profile width : 100mm  
Capacity of oil box : 30L  
Corner crimping casing movement journey : 0-100mm  
Overall dimension : 2000 × 1180 × 1200mm

### FGX-1800/2000/2500 Insulating Glass Automatic Sealing Robot



Max. glass size : 2500 × 2000mm  
Min. glass size : 300 × 180mm  
Glass thickness : 12-60mm  
Coating depth : 3-18mm  
Aluminum frame width : 6-24mm  
Coating speed : 5-40m/min

### FZJ04 Desiccant Automatic Filing Machine

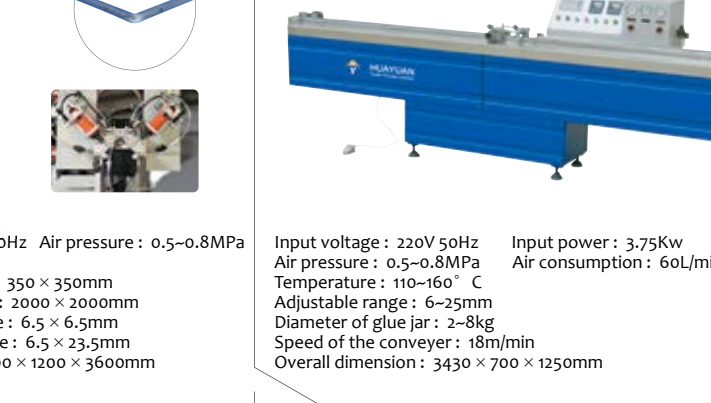


Input voltage : 220V 50Hz  
Air pressure : 0.5-0.8MPa  
Filing speed : 1/8-1/2  
Min. filling frame size : 350 × 350mm  
Max. filling frame size : 2000 × 2000mm  
Min.aluminium bar size : 6.5 × 6.5mm  
Max.aluminium bar size : 6.5 × 23.5mm  
Overall dimension : 900 × 1200 × 3600mm

### XZT Rotated Sealant-spreading Table



Input voltage : 220V 50Hz  
Air pressure : 0.5-0.8MPa  
Temperature : 110-160° C  
Adjustable range : 6-25mm  
Diameter of glue jar : 2-8kg  
Speed of the conveyer : 18m/min  
Overall dimension : 3430 × 700 × 1250mm

### JT02 Butyl Coating Machine

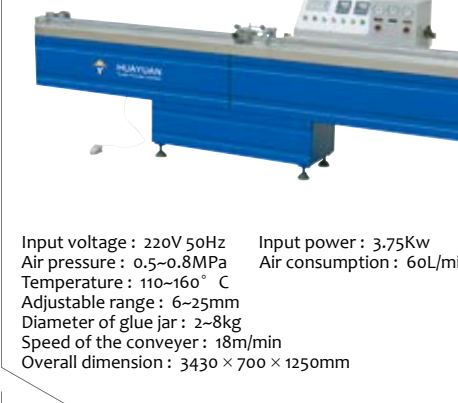

Input voltage : 220V 50Hz  
Air pressure : 0.5-0.8MPa  
Temperature : 110-160° C  
Adjustable range : 6-25mm  
Diameter of glue jar : 2-8kg  
Speed of the conveyer : 18m/min  
Overall dimension : 3430 × 700 × 1250mm

### ST01 Highly Effective Silicone Extruder Machine



Input voltage : 380V 50Hz  
Input power : 2 × 1.5Kw+0.55Kw  
Air pressure : 0.5-0.8MPa  
Air consumption : 60L/min  
Motor rotary speed : 2800r/min  
Cutting width : 150mm  
Cutting height : 200mm(90° ) 160mm(45° )  
Cutting angle : 45° , 90°  
Saw blade specification : Φ500 × Φ30mm  
Cutting length : 480-3700mm  
Overall dimension : 4500 × 1170 × 1400mm



**Aluminum & UPVC Window and door Smart Processing Equipment**

Aluminum door and window processing equipment

UPVC door and window processing equipment

Insulating Glass processing equipment



### LJZ2-500×4200-3-CNC CNC Double-head Cutting Saw for Aluminum & uPVC Profile



### LJZ2S-550×4200-CNC CNC Double-head Precision Cutting Saw for Aluminum & uPVC Profile



### LJZ2-450×3700S Double-head Cutting Saw for Aluminum & uPVC Profile



**HUAYUAN TRADE PRIVATE LIMITED**  
 Ahmedabad Add : No.435/A, Sanathal Circle, Ahmedabad, Gujarat  
 Hyderabad Add : Plot No.P-6/3/A&B/1, Industrial Area, Nacharam, Hyderabad, Telangana  
 Gurgaon Add : Plot No.356, Sector-8, IMT Manesar, Gurugram, Gurgaon, Haryana  
 Coimbatore Add : No.818/A,B/H Raana Furniture,Nr Kathir College,Rajiv Gandhi Nagar,Neelambur,Tamil Nadu  
 Kolkata Add : Binod Kumar Singh, Hazara Para, Dankundi Hooghly, Kolkata  
 Web: www.hyindia.com Email: admin@huayuan.in Ph: +91-7900149698 9081250845

Statmen: HUAYUAN TRADE PRIVATE LIMITED reserved the right to change the appearance, structure, color, model and price about all equipments. If the above will be modified, please forgive us not to notify. The pictures in this manual may be different from the object, please make the object as the standard.

**WFH-2-4MD-140**  
UPVC Window 2-head Seamless Welding Machine



**WFH-4-5MD-140**  
UPVC Window 4-head Seamless Welding Machine



**WFH-2-4MD-140**  
Input voltage: 220V 50Hz  
Input power: 2.5Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 150L/min  
Welding height: 20-140mm  
Welding range: 400-3500mm  
Overall dimension: 4300 × 1100 × 1700mm

**WFH-4-5MD-140**  
Input voltage: 220V 50Hz  
Input power: 4.5Kw  
Air pressure: 0.5-0.8MPa  
Air consumption: 260L/min  
Welding height: 20-140mm  
Welding range: 400-4500mm  
Overall dimension: 5300 × 1100 × 1700mm



**SHJ2Y-140x3500**  
UPVC Window 2-head Welding Machine



**SHJ3Y-140x4500**  
UPVC Window 4-head Welding Machine



**SHJ2Y-140x3500**  
Input voltage: 220V 50Hz  
Input power: 2.5Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 100L/min  
Welding height: 30-140mm  
Welding width: 120mm  
Welding range: 400-3500mm  
Overall dimension: 4400 × 1100 × 1700mm

**SHJ3Y-140x4500**  
Input voltage: 220V 50Hz  
Input power: 3.5Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 150L/min  
Welding height: 30-140mm  
Welding width: 100mm  
Welding range: 400-4500mm  
Overall dimension: 4400 × 1100 × 1700mm

**SHZ01-140**  
Single Head Welding Machine



Input voltage: 220V 50Hz  
Input power: 1.2Kw  
Air pressure: 0.5-0.8MPa  
Air consumption: 50L/min  
Welding height: 30-140mm  
Welding width: 120mm  
Overall dimension: 500 × 900 × 1650mm

**WFH01-140**  
Single Head Seamless Welding Machine



Input voltage: 220V 50Hz  
Input power: 1.5Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 50L/min  
Welding height: 30-140mm  
Welding width: 120mm  
Overall dimension: 960 × 900 × 1460mm



**SJZ2-420x3500**  
Double-head cutting saw for UPVC Profile



Input voltage: 380V 50Hz  
Input power: 2 × 1.5Kw  
Air pressure: 0.5-0.8MPa  
Air consumption: 100L/min  
Motor rotary speed: 2800r/min  
Cutting width: 120mm  
Cutting angle: 45°, 90°  
Saw blade specification: Φ420 × Φ60mm  
Cutting length: 450-3500mm  
Overall dimension: 4000 × 1000 × 14500mm


**SVJ-60**  
UPVC Window V-notch Cutting Saw



Input voltage: 380V 50Hz  
Input power: 2 × 0.75Kw  
Motor rotary speed: 2800r/min  
Air pressure: 0.4-0.6MPa

Air consumption: 80L/min  
Depth cutting: 20-60mm  
Cutting width: 120mm  
Cutting length: 300-1600mm  
Overall dimension: 1300 × 700 × 1350mm

**SYJW-1800**  
Glazing Bead Saw for UPVC Profile

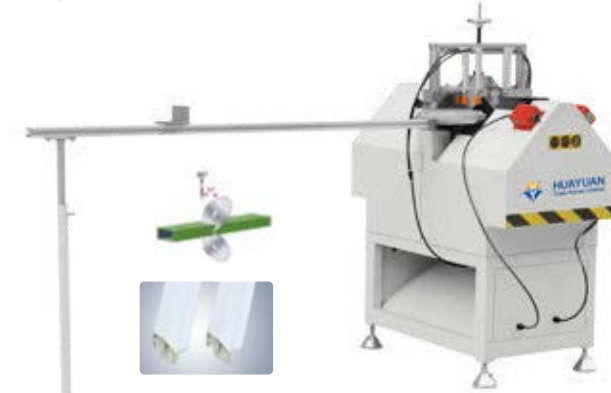

Input voltage: 380V 50Hz  
Input power: 2 × 0.75Kw  
Motor rotary speed: 2800r/min  
Air pressure: 0.5-0.8MPa

Air consumption: 20L/min  
Depth cutting: 29mm  
Cutting width: 120mm  
Cutting length: 320-1800mm  
Overall dimension: 1300 × 700 × 1350mm



**SKX-CNC-1200**  
CNC Milling Drilling Machine



Used for processing round holes, rectangle holes, lock holes and other special-shaped holes on aluminum alloy profiles.  
CNC control system.  
X axis processing length can be customize (450mm;800mm;3000mm etc)



Input voltage: 380V 50Hz  
Total power: 5Kw  
Spindle power: 3.5Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 100L/min  
Spindle rotation speed: 8000-18000r/min  
Travel (X,Y,Z axis): 1200 × 320 × 300mm  
Speed (X,Y,Z axis): 0-60m/min  
Working degree: -90°, 0°, 90°  
Degree: Auto overturn  
Working profile size: 100 × 120mm  
Overall dimension: 1740 × 1550 × 1700mm

**LWYJ-20T**  
CNC Bending Machine



Can process different materials (aluminum, iron, stainless steel, copper etc).  
Shapes are numerous (C-shaped, U-shaped, elliptical, full-circle, S-shaped and bread-shaped arcs, 3R-shaped Etc).  
Would need customized as per profile, Charge is Extra.



Input voltage: 380V 50Hz  
Input power: 5.2Kw  
Air pressure: 0.2MPa  
Min. radius of bending: 180mm  
Max. width of profile: 150mm  
Max. diameter of roller: 200mm  
Center dist. of fixed roller: 338mm  
Fixed roller diameter: 140mm  
Hydraulic pressure: 20T  
Roller spindle diameter: 65mm  
Rotation speed of shaft: 1-8r/min  
Positioning precision: 0.01mm  
Max. stroke of upper roller: 200mm  
Torque: 25000N·m  
Overall dimension: 1400 × 1500 × 1600mm

**SCX02**  
2-axis Water Slot Milling Machine



Input voltage: 220V 50Hz  
Input power: 2 × 0.38Kw  
Air pressure: 0.4-0.6MPa  
Air consumption: 15L/min  
Main-shaft revolution: 2500r/min  
Drilling bits diameter: Φ5 Φ4mm  
Slot depth: 30mm  
Slot length: 30-60mm  
Overall dimension: 1925 × 750 × 1600mm

**SQJA-CNC-120 (3/5/6 Knives)**  
UPVC Window CNC Corner Cleaning Machine



Input voltage: 380V 50Hz  
Input power: 1.5Kw  
Air pressure: 0.4-0.7MPa  
Air consumption: 80L/min  
Profile height: 20-150mm  
Profile width: 20-100mm  
Milling cutter rotate speed: 2800r/min  
Drawing groove width: 3mm  
Drawing groove depth: 0.3mm  
Overall dimension: 1600 × 880 × 1650mm


**SYH01-1800**  
UPVC Profile Bending Machine



Input voltage: 380V 50Hz  
Input power: 8Kw  
Profile heating temperature: 90-130°C  
Circular arc diameter of machined profile: 500-1800mm  
Overall dimension: 4500 × 2800 × 800mm

**HN-CNC-4028**  
CNC Automatic Glass Cutting Line

Working table can be customized as per requirements  
Composed of auto glass loading machine, CNC glass cutting machine and air float glass breaking table, which can realize glass automatic loading, transmission, positioning, optimization, cutting and breaking function.

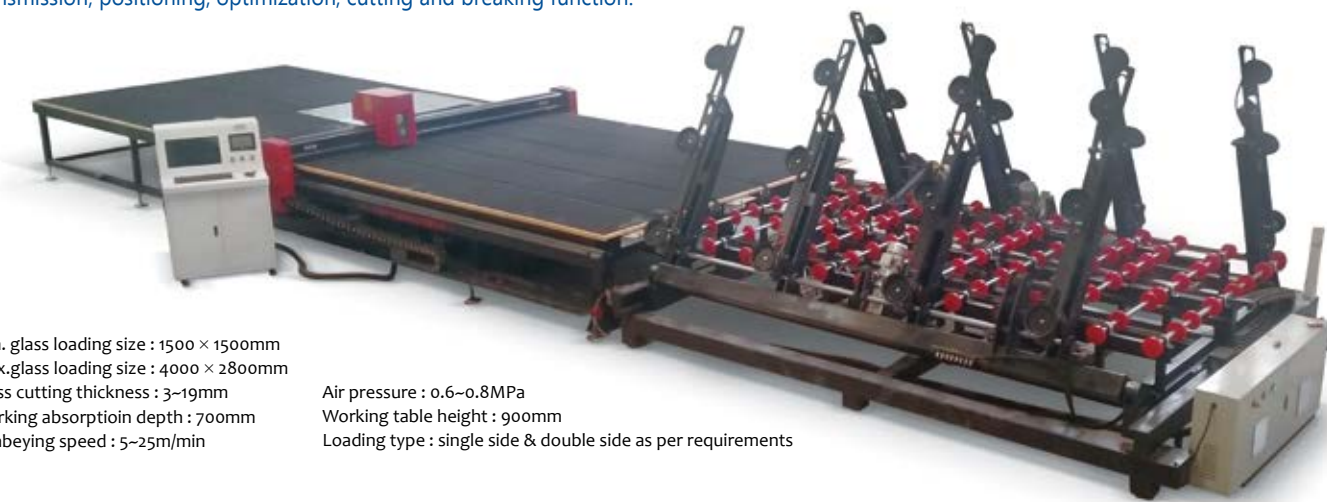

Min. glass loading size: 1500 × 1500mm  
Max. glass loading size: 4000 × 2800mm  
Glass cutting thickness: 3-19mm  
Working absorption depth: 700mm  
Conveying speed: 5-25m/min

Air pressure: 0.6-0.8MPa  
Working table height: 900mm  
Loading type: single side & double side as per requirements

**HN-3826**  
CNC All-in-one Glass Cutting Machine



Input voltage: 380V 50Hz  
Table height: 800 ± 30mm (can be adjusted)  
Air pressure: 0.6MPa  
Max. Cutting size: 3660 × 2400mm  
Cutting thickness: 3-19mm  
Cutting acceleration: 26m/s²  
Cutter holder: The cutter head can be rotated 360 degrees (accurately cutting straight lines and special shapes)  
Overall dimension: 4700 × 3000 × 1600mm

**LB1800P/LB1600P**  
Automatic Insulating Glass Production Line



**LB1800P**  
Max glass size: 1800 × 2500mm  
Min glass size: 450 × 450mm  
Pane glass thickness: 3-12mm  
Max I.G. Unit thickness: 12-40mm  
Glass washing speed: 0-8m/min

Working speed: 2-22m/min  
Air source (air pressure): 0.8m³/min (1MPa)  
Power: 21.95kW  
Water electrical conductivity: ≤50 μS/cm  
Overall dimension: 15000 × 1800 × 2630mm

**LB1600P**  
Max glass size: 1600 × 2000mm  
Min glass size: 450 × 450mm  
Pane glass thickness: 3-12mm  
Max I.G. Unit thickness: 12-40mm  
Glass washing speed: 0-8m/min

Working speed: 2-22m/min  
Air source (air pressure): 0.8m³/min (1MPa)  
Power: 18kW  
Water electrical conductivity: ≤50 μS/cm  
Overall dimension: 13500 × 1800 × 2630mm



**LZ3F-290x100**  
Copy-Router & Lock-hole Machine



Input voltage: 380V 50Hz  
Input power: 2.6Kw  
Air pressure: 0.6-0.8MPa  
Cutter diameter: Φ5 Φ8mm  
Centers distance of the three-hole drilling head: Φ12mm  
Cutter diameter: Φ5 Φ8mm  
Copy-routing range: 290 × 100mm  
Overall dimension: 1000 × 1130 × 1600mm

**LZ3FX-235x100**  
High Speed Lock Hole Drilling Machine



Input voltage: 380V 50Hz  
Input power: 3.3Kw  
Air pressure: 0.5-0.8MPa  
Cutter diameter: Φ5 Φ8mm  
Copy-routing range: 235 × 100mm  
Centers distance of the three-hole drilling head: 21.5 × 21.5mm  
Overall dimension: 1000 × 1130 × 1500mm

**LXF-235x100**  
Single Head Copy Router



Input voltage: 380V 50Hz  
Input power: 1.1Kw  
Air pressure: 0.5-0.8MPa  
Cutter diameter: Φ5 Φ8mm  
Copy-routing range: 270 × 100mm  
Overall dimension: 870 × 700 × 1500mm

